



SCCG50 & SCCP50 – 50 lb Gourmet Ice Machine

SCCG50 & SCCP50 – 50 lb Gourmet Ice Machine

Brilliance™ Under-Counter Gourmet Ice Machine



Features

15" cabinet width, produces up to 65 lbs. of gourmet ice in 24 hours. Stores up to 26 lbs.

Uniquely-shaped, crystal-clear, slow-melting, taste-free, odorless ice - won't dilute the flavor of drinks.

Uses less than half the energy and one third the water of previous model

Designed with sleek new styling and virtually disappears when installed with a custom wood front that matches surrounding cabinetry. Finish options to choose from include, stainless, black or white front panel kits if a custom wood front panel is not used. A kit is available to adapt an existing custom wood front panel on the new ice machine.

Outdoor stainless steel model available.

Water-quality sensor detects hard water conditions and control system purges mineral laden water with every harvest cycle, which helps extend the time between cleanings.

Lighted bin and self-closing door.

User-friendly control panel informs whether power is on, alerts a no-water condition, and a time to clean reminder.

Available with built-in drain pump.

24 Hour Ice Production & Storage Capacity

| 70°F/21°C Air 50°F/10°C Water lb / kg | 90°F/32°C Air 70°F/21°C Water lb / kg | Bin Storage Capacity lb / kg |
|---|---|---------------------------------|
| 65 / 30 | 50 / 23 | 26 / 12 |



Control Board



Water Sensor



Scoop



Gourmet Ice



Gourmet Cube
1" x 1 1/8" x 1 1/4"
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.


Warranty valid in North America.

Scotsman Ice Systems
775 Corporate Woods Parkway
Vernon Hills, IL 60061

1-800-SCOTSMAN
Fax: 847-913-9844
E-mail: customer.service@scotsman-ice.com

www.scotsman-ice.com



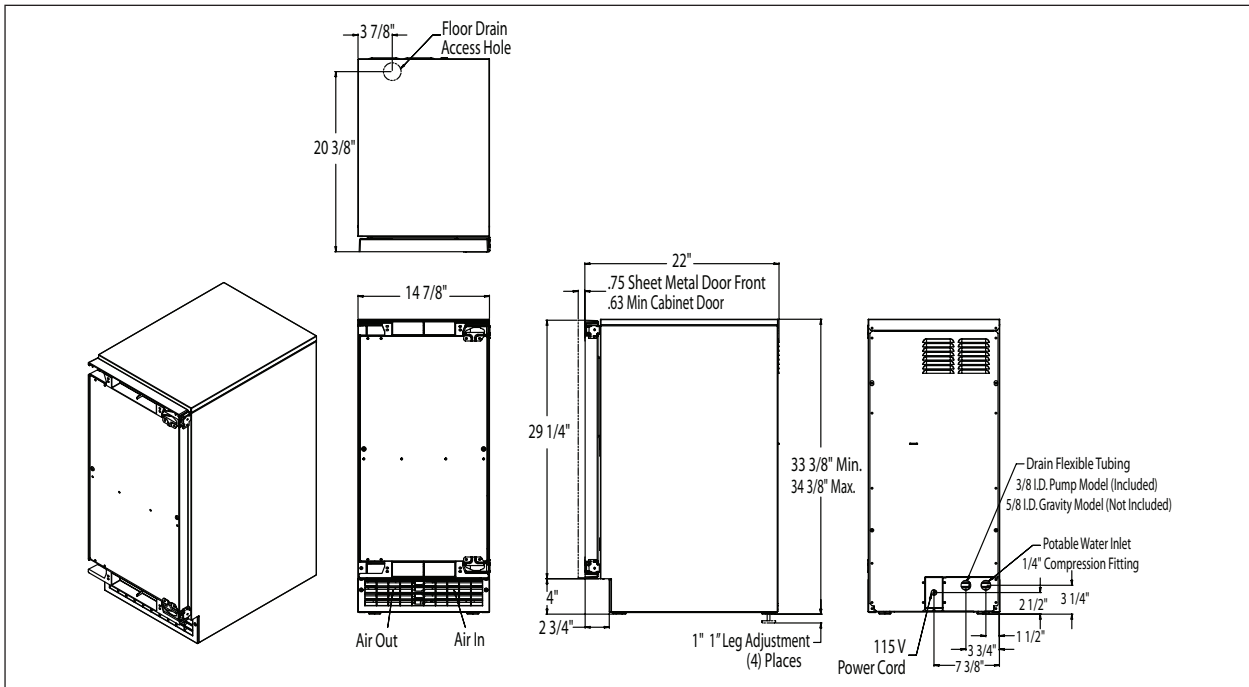

All Models

24 Hour Ice Production:
 (70 deg. Air/50 deg. Water)
 65 lb / 30 kg
 (90 deg. Air / 70 Deg. Water)
 50 lb / 23 kg

Bin Storage Capacity:
 26 lb / 12 kg

Condenser Type:
 Air

Basic Electrical:
 (Volts/Hz/Phase)
 115/60/1

Amps:
 5

Maximum Fuze Size:
 15

Refrigerant:
 R-134A

Dimensions (W x D x H):
 Unit (without legs):
 14.875" x 22" x 33.375"
 (37.8 x 55.9 x 84.78 cm)

Shipping Carton:
 18" x 26" x 30"
 (45.7 x 66.0 x 76.2 cm)

Specifications

| Model | Finish Cabinet / Front | Drain Type | Shipping Weight lb / kg |
|---------|------------------------|-----------------------------------|-------------------------|
| Indoor | SCCG50M-1BU | Black / Unfinished | Gravity 113 / 51 |
| | SCCG50M-1WU | White / Unfinished | Gravity 113 / 51 |
| | SCCG50M-1SU | Stainless Steel / Unfinished | Gravity 113 / 51 |
| | SCCP50M-1BU | Black / Unfinished | Pump 118 / 54 |
| | SCCP50M-1WU | White / Unfinished | Pump 118 / 54 |
| Outdoor | SCCG50M-1SS | Stainless Steel / Stainless Steel | Gravity 122 / 55 |
| | SCCP50M-1SS | Stainless Steel / Stainless Steel | Pump 127 / 58 |

SCCG: Gravity flow drain tube
 SCCP: Built-in pump to expel drain water which includes 10' drain tube

Accessories

| Model | Description |
|-------|---|
| KDFB | Black door front kit |
| KDFW | White door front kit |
| KDFS | Stainless Steel door front kit |
| KDFWS | White front with Stainless Steel handle kit |
| KDFBS | Black front with Stainless Steel handle kit |
| KKPF | Kick plate filler kit |
| KATB | Anti-tip bracket kit |

Operating Requirements

| | Minimum | Maximum |
|---------------------------|-----------------|-----------------|
| Air Temperatures | 50°F (10°C) | 100°F (38°C) |
| Water Temperatures | 40°F (4.4°C) | 100°F (38°C) |
| Water Pressures | 14 PSIG (1 bar) | 70 PSIG (5 bar) |
| Electrical Voltage | -10% | +10% |

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50M-1SS & SCCP50M-1SS, are not designed for outdoor installations nor for installation where air temperatures fall below 50°F. or exceed 100°F., nor where water temperatures fall below 40°F. or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.